


# Dismantling Joint with Locking Device

DN80 – 600, PN40

With stud and nuts to enable adjustable locking device, PN10 Flange ends on both sides in accordance to EN1092-2, ISO2532.

For easy installation and dismantling of valves and other pipeline equipment and equalisation of pipe forces.

- ✓ Flange in Accordance with BS EN1092, PN40
- ✓ Nominal Pressure: 40 bar
- ✓ Fusion Bonded Epoxy
- ✓ Rubber Ring Gasket
- ✓ Galvanized Steel Stud
- ✓ Alternative Pressure Ratings and Sizes Available On Request

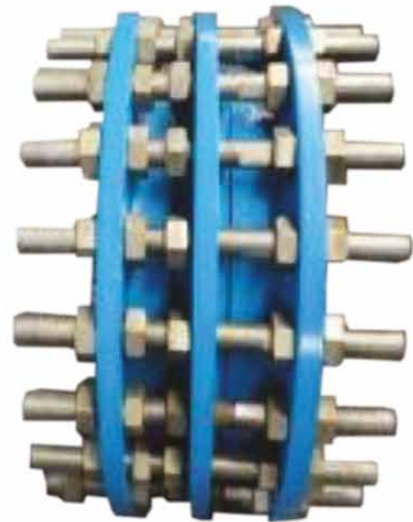

## Materials List

No.	Name	Material
1	Pipe	GGG40
2	Press Ring	GGG40
3	Seal Ring	EPDM
4	Body	GGG40
5	Stud	CS 8.8 galvanized
6	Nut	CS 8.8 galvanized

### Technical information


Materials for potable water as required by:



Studs and Nuts Also Available in A2 and A4 Stainless Steel

# Dismantling Joint with Locking Device

DN80 – 600, PN40

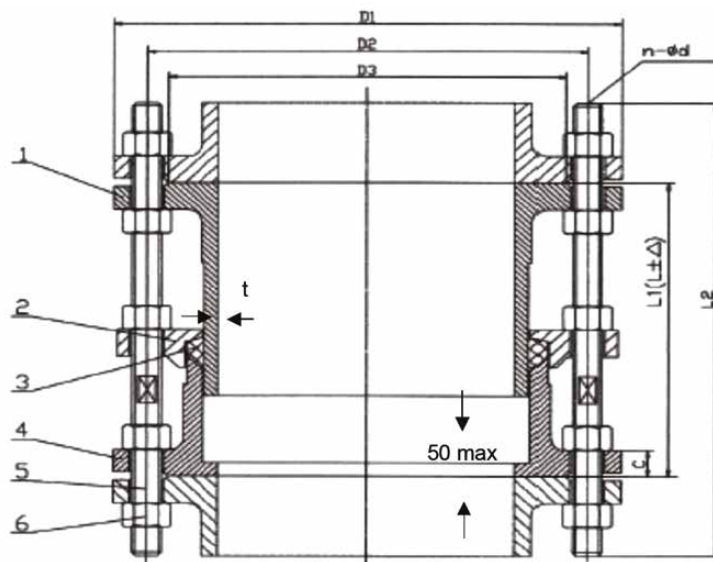

## Dimensions Table

DN	D4	D5	L1	L2	d-N	t
80	160	200	230	380	19-8	7.0
100	190	235	240	390	23-8	7.2
125	220	270	240	390	28-8	7.5
150	250	300	250	400	28-8	7.8
200	320	375	250	400	31-12	8.4
250	385	450	270	440	34-12	9.0
300	450	515	270	440	34-16	9.6
350	510	580	290	460	37-16	10.2
400	585	660	300	500	40-16	10.8
450	610	685	300	500	40-20	11.4
500	670	755	320	510	43-20	12.0
600	795	890	340	550	49-20	13.2

Severn Utilities Valves reserves the right to change product design and specification without notice. Further sizes and other technical standards on request.